EH090

ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

Capacity *lbs*	90
Cylinder Diameter *inch*	35.4
Cylinder Depth *inch*	24.4
Cylinder Volume *cu ft*	13.9
Net Weight *lbs*	3106
Crated Weight *lbs*	3405
Machine Dimensions *inch* WxDxH	54.7 x 57.3 x 70.8
Door Opening *inch*	22
Floor to Door *inch*	25.9
Shipping Dimensions *inch* WxDxH	59.8 x 62.2 x 79.9
Washing Speed *rpm*	19/26/33/40
Spin Speeds *rpm*	40/79/325/490/680/870
G-force	0.8/3.1/53/121/233/381
Static Force Transmitted *lbs*	3547
Dynamic Force Transmitted *lbs*	556
Frequency of Dynamic Force *Hz*	14.5
Available Voltages/Wire Conductor/Amp	
Hot Water (standard)	208-240/60/3, 3W+G, 15
Hot Water (standard)	440-480/60/3, 3W+G, 10
Electric Auxiliary Heat (optional)	208/60/3, 3W+G, 80
Electric Auxiliary Heat (optional)	240/60/3, 3W+G, 80
Steam Auxiliary Heat (optional)	208-240/60/3, 3W+G, 15
Steam Auxiliary Heat (optional)	440-480/60/3, 3W+G, 10
Drain Diameter *inch*	3
Water Inlets *inch*	2 @ 1
Recommended Water Pressure *PSI*	30-60
Water Flow *gal/min*	26
Steam Connection *inch*	3/4
Steam Pressure (optional) *PSI*	29-87
Steam Flow (optional) *lbs/h*	397
Total Power *kW*	4.8
Electrical Heating Power (optional) *kW*	
208/60/3	18.6
240/60/3	24.2

*** Specifications subject to change without notice or obligation. Contact Continental Girbau at (800) 256-1073 for dimensions not shown or for clarification.**

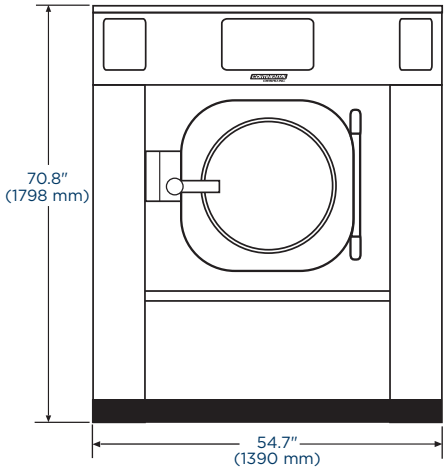

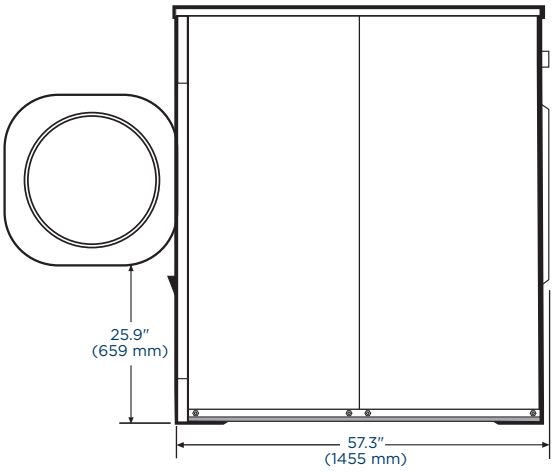

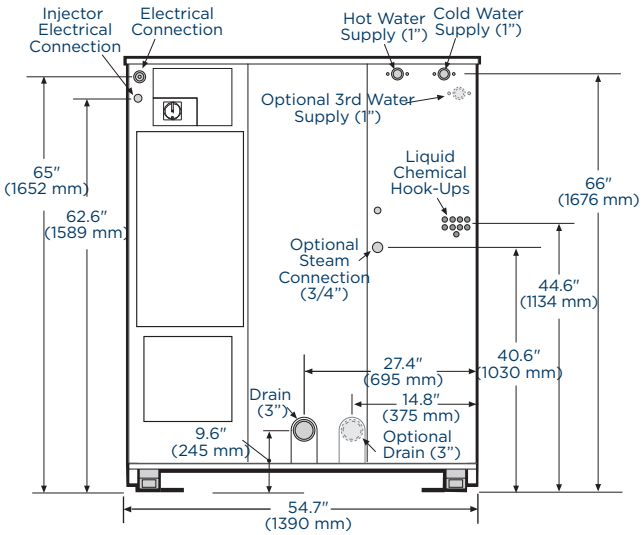

continentalgirbau.com • (800) 256-1073
2500 State Road 44 • Oshkosh, WI 54904

CONTINENTAL GIRBAU®